


# **PRODUCT SUBMITTAL**

Subr	mitted to:							
Proje	ect:							
Date	Date of Submittal:							
Subr	mitted by, Contact	name:						
Comp	Company:							
Addre	ess:							
Phon	e:							
Email								
	Approved	Approved as Noted	Not Approved					
Com	ments:							
By:		Date:						

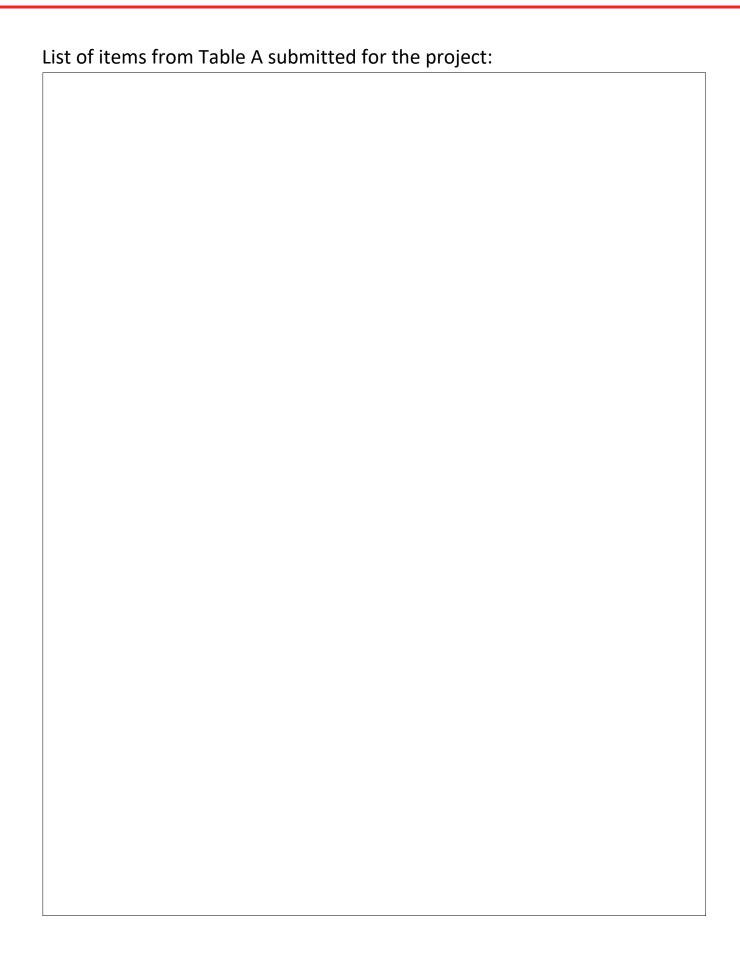

## Product Family: PSU - UltraPro™- Self-Piercing Scavenger® II UltraCut™ Thread

#### **TABLE A**

Item Number	Screw Size (#)	Length (in.)	Head Style	Head Diameter (in.)	ТРІ	Point Style	Coating	Drive Type	Approximate Bulk Quantity
U8125YZ	8	1-1/4	Scavenger® II	0.343	12	QuickGrab™	Yellow Zinc	#2 LOX	3,800
U8150YZ	8	1-1/2	Scavenger® II	0.343	12	QuickGrab™	Yellow Zinc	#2 LOX	3,300
U8200YZ	8	2	Scavenger® II	0.343	12	QuickGrab™	Yellow Zinc	#2 LOX	2,500
U9250YZ	9	2-1/2	Scavenger® II	0.346	11	QuickGrab™	Yellow Zinc	#2 LOX	2,000
U10300YZ	10	3	Scavenger® II	0.358	10	QuickGrab™	Yellow Zinc	#2 LOX	1,400
U10350YZ	10	3-1/2	Scavenger® II	0.358	10	QuickGrab™	Yellow Zinc	#2 LOX	1,200
U10400YZ	10	4	Scavenger® II	0.358	10	QuickGrab™	Yellow Zinc	#2 LOX	1,000
U10450YZ	10	4-1/2	Scavenger® II	0.358	10	QuickGrab™	Yellow Zinc	#2 LOX	900
U10500YZ	10	5	Scavenger® II	0.358	10	QuickGrab™	Yellow Zinc	#2 LOX	800
U8125G	8	1-1/4	Scavenger® II	0.343	12	QuickGrab™	GrabberGard® 15 Gold	#2 LOX	3,800
U8150G	8	1-1/2	Scavenger® II	0.343	12	QuickGrab™	GrabberGard® 15 Gold	#2 LOX	3,300
U8200G	8	2	Scavenger® II	0.343	12	QuickGrab™	GrabberGard® 15 Gold	#2 LOX	2,500
U9250G	9	2-1/2	Scavenger® II	0.346	11	QuickGrab™	GrabberGard® 15 Gold	#2 LOX	2,000
U10300G	10	3	Scavenger® II	0.358	10	QuickGrab™	GrabberGard® 15 Gold	#2 LOX	1,400
U10350G	10	3-1/2	Scavenger® II	0.358	10	QuickGrab™	GrabberGard® 15 Gold	#2 LOX	1,200
U10400G	10	4	Scavenger® II	0.358	10	QuickGrab™	GrabberGard® 15 Gold	#2 LOX	1,000
U10450G	10	4-1/2	Scavenger® II	0.358	10	QuickGrab™	GrabberGard® 15 Gold	#2 LOX	900
U10500G	10	5	Scavenger® II	0.358	10	QuickGrab™	GrabberGard® 15 Gold	#2 LOX	800

Grabber screws manufactured in America are available as SPECIAL-ORDER INVENTORY. CONTACT GRABBER FOR CURRENT PRICE AND AVAILABILITY. For identification purposes, an "A" will added to the end of the item number and "Made in America" will be printed on the label.

Prefixes: X = 1-lb , VB = 5-lb, BP = Blister Pack, C = Collated

Description: Scavenger™ II Head Type 17 QuickGrab™ Point UltraCut Thread™ with DrawTite™ Upper Threads screw used in wood-to-wood applications.


Directions: Use a standard screwgun with a depth sensitive nose piece. Suggested screwgun specification for optimal performance - Gauges #6 to #10, up to 4,000 RPM. The head is fully

seated when the head is flush with the work surface. Overdriving may result in failure of the fastener.

Corrosion: For corrosion resistance results, see Table B

Certifications: All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified.

### PSU - UltraPro™

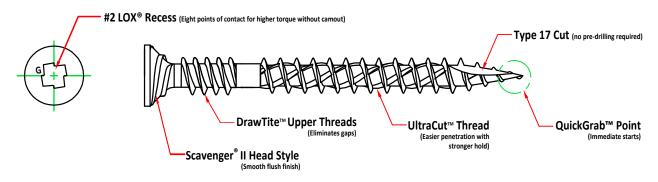

#### **TABLE B**

CORROSION RESISTANCE TESTING RESULTS						
Finish	Test	Standard/Protocol	Results (minimum)			
(YZ) Yellow Zinc	Salt Spray	ASTM B117	24 hours, no red rust			
(RG) GrabberGard® 15 Gold	Salt Spray	ASTM B117	1500 hours, no red rust			

NOTE: Salt Spray Testing (SST) results are not intended to predict corrosion resistance in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool to compare different metals and different metal coatings in a tightly controlled highly corrosive environment for specific periods of time. For more information about corrosion resistance, see the *Grabber Guide to Corrosion Resistance for Fasteners*.

Grabber's approved mills keep tight control over all production standards and processes. Grabber's mills are ISO 9001 ensuring Grabber fasteners meet or exceed the highest industry standards.

## TRADEMARKS:

The following trademarks used herein are owned by Grabber Construction Products, Inc.:

GRABBER\* UltraPro™
GrabberGard\* DrawTite™
Scavenger\* UltraCut™
LOX\* QuickGrab™

## NOTICE:

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instruction or for other than the intended use. Our Liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days of the date it was or reasonably should have been discovered.