
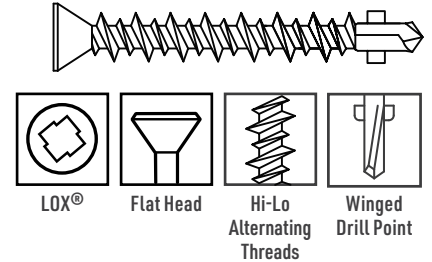
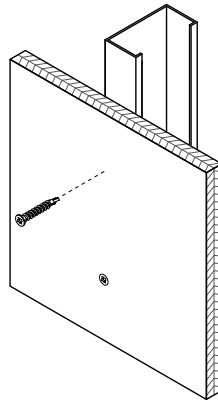


# Flat Head PlySteel Screws - Interior

## Sheathing to Heavy-Gauge Steel



**Description** Attaches sheathing and plywood/OSB subfloor panels to heavy-gauge steel.

**Specifications**

- Size | Gauge:** #10
- Length:** 1 1/2 in. to 2 1/2 in.
- Head Type:** Flat Head
- Recess Type:** #3 LOX®
- Thread Type:** High-Lo Alternating, Single Lead
- Finish:** Yellow Zinc

**Quality Assurance:** Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.

**LEED Reporting:** The post-consumer recycled steel content is 25%.

**Compliance:** The fasteners comply with ASTM C1513 performance requirements.

**Applications**

- Attaches plywood/OSB subfloor paneling and other sheathing to heavy-gauge steel

**Installation**

- Use a standard screw gun with a depth-sensitive nose piece. Suggested screw gun specification for optimal performance: size #10, up to 2,500 RPM.
- Because of significantly higher torque output, care and caution should be exercised when using an impact driver; otherwise, screw failure or spin-out may occur.
- The flat head is fully seated when it is flush with the work surface.
- The fastener must penetrate beyond the steel three full thread pitches.
- Overdriving may result in failure of the fastener.

**Features**

- LOX® recess is designed for high-torque applications and will not strip out like most other recesses.
- Hi-Lo threads decrease needed torque.
- Special wings clear away sheathing material as the fastener drives in.
- The flat head leaves a smooth, finished surface.
- Consistently formed extra-sharp drill point starts and drills easily into heavy-gauge steel.

# Flat Head PlySteel Screws - Interior Sheathing to Heavy-Gauge Steel



### Standard Corrosion Test Results

Finish	Test	Standard/Protocol	Results
Yellow Zinc	Salt Spray	ASTM B117	24 hrs., no red rust

Note: Salt Spray Testing (SST) results are not intended to predict corrosion in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool for comparing different metals and different metal coatings in a tightly controlled, highly corrosive environment for specific periods of time. For more information about corrosion resistance, see the Grabber Guide to Corrosion Resistance for Fasteners.


### Pull-Out Test Data<sup>1</sup>

Screw Gauge	TPI <sup>2</sup>	Steel Gauge	Design Thickness	Tension	Shear
#10	15	18	0.0451 in.	109 lbs.	263 lbs.
		16	0.0566 in.	198 lbs.	370 lbs.
		14	0.0713 in.	249 lbs.	523 lbs.
		12	0.1017 in.	356 lbs.	891 lbs.
		10	0.1242 in.	434 lbs.	1,199 lbs.

<sup>1</sup>Test data values reported are allowable as determined by calculations and industry established test criteria, such as ICC-ES Acceptance Criteria and ASTM test standards. Please contact Grabber for detailed information about testing performed for specific products or if ultimate values are needed.

### Sheet Steel Gauges

Gauge No.	Design Thickness	Millimeter Equivalent
25	0.0188 in.	0.4775 mm
20	0.0346 in.	0.8788 mm
18	0.0451 in.	1.1455 mm
16	0.0566 in.	1.4376 mm
14	0.0713 in.	1.8110 mm
12	0.1017 in.	2.5832 mm
10	0.1242 in.	3.1547 mm

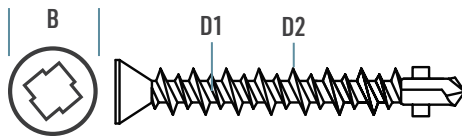

### Product Dimensions

Screw Gauge	B Head Dia.	Recess	D1 Hi Thread Major Diameter	D2 Lo Thread Major Diameter	TPI <sup>2</sup>
#10	0.368 in.	#3 LOX <sup>®</sup>	0.211 in.	0.169 in.	15 Hi-Lo

<sup>2</sup>TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

### Ordering Information and Product Options

Item No.	Size	Recess	Head Diameter	TPI	Quantity	Weight	Special Features
Yellow Zinc							
10200L3YZE	10 x 2 in.	#3 LOX <sup>®</sup>	0.368 in.	15 Hi-Lo	3,500	41 lb.	Winged pilot point
C10150L3YZH	10 x 1 1/2 in.	#3 LOX <sup>®</sup>	0.368 in.	15 Hi-Lo	1,000	5 lb.	Collated, Winged pilot point
C10175L3YZE	10 x 1 3/4 in.	#3 LOX <sup>®</sup>	0.368 in.	15 Hi-Lo	1,000	5 lb.	
C10200L3YZE	10 x 2 in.	#3 LOX <sup>®</sup>	0.368 in.	15 Hi-Lo	1,000	5 lb.	
C10250L3YZE	10 x 2 1/2 in.	#3 LOX <sup>®</sup>	0.368 in.	15 Hi-Lo	1,000	5 lb.	

Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website. The items listed are bulk size. Most are also available in smaller package sizes such as 5 lb. and 1 lb. Contact your local Grabber Branch or GrabberPro for more information.

Flat Head PlySteel Screws - Interior  
PS1007 USA-ENG/Rev. 02-25

GRABBER CONSTRUCTION PRODUCTS, INC.  
5255 W 11000 N., STE 100  
HIGHLAND, UT 84003

(800) 477-8876 | GrabberPro.com

**SAFETY FIRST:** Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

**TECHNICAL INFORMATION:** Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2025 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.  
The trademarks Grabber, LOX, and Stylized G on Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

