



21° Plastic Strip Collated Nails

Wood Framing Nails


GRABBER®
CONSTRUCTION PRODUCTS





Ring Shank




Screw Shank




Smooth Shank

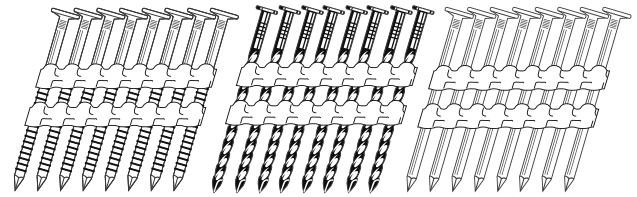


Full Round Head




Ring Shank



Screw Shank



Smooth Shank



Diamond Point

Description 21° Plastic strip wood framing nails.

Specifications

Size | Gauge: 0.113 in. to 0.162 in.

Length: 2 in. to 5 in.

Head Type: Full Round

Shank Type: Ring, Screw, Smooth

Finish: Bright, Hot-Dip Galvanized, Stainless Steel, Thermal Diffusion Galvanized

Quality Assurance: Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.

LEED Reporting: The post-consumer recycled steel content is 25%.

Compliance: The fasteners comply with ASTM F1667 performance requirements.

Applications

- Wood-to-wood framing
- General wood construction

Installation

- Use with any 21° pneumatic nail gun.
- The head is fully seated when it is flush with the work surface.


Features

- Full round head nails provide a larger load-bearing surface for framing and general construction.
- Smooth shank penetrates the wood easily and smoothly.
- Ring shank nails have robust holding power. As the nail penetrates wood, fibers lock around the grooves in the shank, creating a durable bond.
- Nails with screw or spiral shanks rotate during installation, increasing pull-out resistance.
- Diamond point is designed to easily drive into wood, and it helps prevent splitting.

21° Plastic Strip Collated Nails

Wood Framing Nails

GRABBER
CONSTRUCTION PRODUCTS

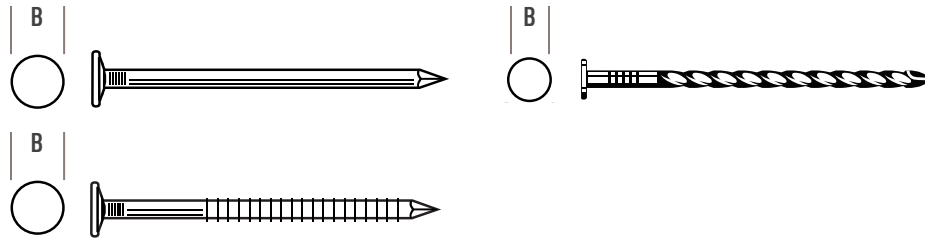

Product Dimensions

B Head Diameter	Wire Diameter	Shank Type
0.276 in.	0.113 in.	Ring
0.276 in.	0.113 in.	Smooth
0.276 in.	0.113 in.	Screw
0.276 in.	0.120 in.	Ring
0.276 in.	0.120 in.	Smooth
0.276 in.	0.120 in.	Screw
0.276 in.	0.121 in.	Screw
0.276 in.	0.131 in.	Ring
0.276 in.	0.131 in.	Smooth
0.295 in.	0.148 in.	Ring
0.295 in.	0.148 in.	Smooth
0.319 in.	0.162 in.	Smooth

Ordering Information and Product Options

Item No.	Length	Head Type	Head Diameter	Shank Diameter	Shank Type	Amount	Weight	Special Features
Bright								
12 Gauge								
PS238113RGBR	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	5,000	33 lb.	
PS238113RGBR2M	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	2,000	13 lb.	
PS238113RGBRM	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	1,000	7 lb.	
PROPS238113RGBR	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	5,000	35 lb.	
PS238113SCBRM	2 3/8 in.	Round	0.276 in.	0.113 in.	Screw	1,000	14 lb.	
PS238113BR	2 3/8 in.	Round	0.276 in.	0.113 in.	Smooth	5,000	33 lb.	
PS238113BR2M	2 3/8 in.	Round	0.276 in.	0.113 in.	Smooth	2,000	14 lb.	
11 Gauge								
PS238120BR	2 3/8 in.	Round	0.276 in.	0.120 in.	Smooth	4,800	30 lb.	
PS300120RGBR	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	39 lb.	
PS300120SCBR	3 in.	Round	0.276 in.	0.120 in.	Screw	4,000	39 lb.	
PS300120BR	3 in.	Round	0.276 in.	0.120 in.	Smooth	4,000	39 lb.	
PS300120BR2M	3 in.	Round	0.276 in.	0.120 in.	Smooth	2,000	19 lb.	
PS314120BR	3 1/4 in.	Round	0.276 in.	0.120 in.	Smooth	4,000	43 lb.	
PS314120BR2M	3 1/4 in.	Round	0.276 in.	0.120 in.	Smooth	2,000	21 lb.	

21° Plastic Strip Collated Nails

Wood Framing Nails



Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Diameter	Shank Diameter	Shank Type	Amount	Weight	Special Features
Bright (continued)								
10 Gauge								
PS212131RGBR	2 1/2 in.	Round	0.276 in.	0.131 in.	Ring	4,000	37 lb.	
PS212131RSBR	2 1/2 in.	Round	0.276 in.	0.131 in.	Ring	5,000	49 lb.	
PS212131BR	2 1/2 in.	Round	0.276 in.	0.131 in.	Smooth	5,000	49 lb.	
PS300131BR	3 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	46 lb.	
PS300131RGBR	3 in.	Round	0.276 in.	0.131 in.	Ring	4,000	46 lb.	
PS300131RGBR	3 in.	Round	0.276 in.	0.131 in.	Ring	4,000	46 lb.	
PS300131BR2M	3 in.	Round	0.276 in.	0.131 in.	Smooth	2,000	22 lb.	
PS300131BRM	3 in.	Round	0.276 in.	0.131 in.	Smooth	1,000	10 lb.	
PS314131BR	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	50 lb.	
PS314131BR2M	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	2,000	24 lb.	
PS314131BR2M	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	2,000	24 lb.	
PS314131BRM	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	1,000	11 lb.	
PS312131BR	3 1/2 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	54 lb.	
9 Gauge								
PS214148BR	2 1/4 in.	Round	0.295 in.	0.148 in.	Smooth	4,000	40 lb.	
PS238148RGBRM	2 3/8 in.	Round	0.295 in.	0.148 in.	Ring	1,000	7 lb.	
PS300148BR	3 in.	Round	0.295 in.	0.148 in.	Smooth	4,000	59 lb.	
PS314148BR	3 1/4 in.	Round	0.295 in.	0.148 in.	Smooth	4,000	52 lb.	
PS500148BR	5 in.	Round	0.295 in.	0.148 in.	Smooth	1,800	43 lb.	
8 Gauge								
PS314162BR	3 1/4 in.	Round	0.319 in.	0.162 in.	Smooth	3,000	55 lb.	
PS312162BR	3 1/2 in.	Round	0.319 in.	0.162 in.	Smooth	3,000	60 lb.	
Hot-Dipped Galvanized								
12 Gauge								
PS200113RGHDGM	2 in.	Round	0.276 in.	0.113 in.	Ring	1,000	6 lb.	
PS200113RGHDG	2 in.	Round	0.276 in.	0.113 in.	Ring	2,000	37 lb.	
PS238113RGHDG2M	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	2,000	17 lb.	
PS238113RGHDGM	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	1,000	8 lb.	
PS238113RGHDG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	5,000	35 lb.	
PS238113RGHDG2	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	2,000	14 lb.	
PS238113SCHDGM	2 3/8 in.	Round	0.276 in.	0.113 in.	Screw	5,000	35 lb.	
PS238113HDG	2 3/8 in.	Round	0.276 in.	0.113 in.	Smooth	5,000	35 lb.	
11 Gauge								
PS300120RGHDGM	3 in.	Round	0.276 in.	0.120 in.	Ring	1,000	9 lb.	
PS300120RGHDG	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	39 lb.	
PS300120SCHDGM	3 in.	Round	0.276 in.	0.120 in.	Screw	4,000	39 lb.	
PS300120HDG	3 in.	Round	0.276 in.	0.120 in.	Smooth	4,000	39 lb.	
PS314120RGHDG	3 1/4 in.	Round	0.276 in.	0.120 in.	Ring	4,000	42 lb.	

21° Plastic Strip Collated Nails

Wood Framing Nails



Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Diameter	Shank Diameter	Shank Type	Amount	Weight	Special Features
Hot-Dipped Galvanized (continued)								
11 Gauge (continued)								
PS314120RGHDG2M	3 1/4 in.	Round	0.276 in.	0.120 in.	Ring	2,000	20 lb.	
PS314120RGHDG	3 1/4 in.	Round	0.276 in.	0.120 in.	Ring	4,000	56 lb.	
PS314121SCHDG	3 1/4 in.	Round	0.276 in.	0.120 in.	Screw	4,000	42 lb.	
PS3120RGHDG2	3 1/2 in.	Round	0.276 in.	0.120 in.	Ring	2,000	19 lb.	
10 Gauge								
PS212131RSHDG	2 1/2 in.	Round	0.276 in.	0.131 in.	Ring	5,000	49 lb.	
PS212131RGHDG	2 1/2 in.	Round	0.276 in.	0.131 in.	Ring	5,000	49 lb.	
PS212131HDG	2 1/2 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	40 lb.	
PS300131RGHDG	3 in.	Round	0.276 in.	0.131 in.	Ring	4,000	46 lb.	
PS300131HDG	3 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	46 lb.	
PS314131RGHDG	3 1/4 in.	Round	0.276 in.	0.131 in.	Ring	4,000	50 lb.	
PS314131HDG	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	50 lb.	
9 Gauge								
PS300148HDG	3 in.	Round	0.295 in.	0.148 in.	Smooth	4,000	59 lb.	
Thermal Diffusion Galvanized								
12 Gauge								
PS238113RGTDG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	5,000	35 lb.	
PS238113SCTDG	2 3/8 in.	Round	0.276 in.	0.113 in.	Screw	5,000	35 lb.	
11 Gauge								
PS300120RGTDG	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	39 lb.	
PS300120SCTDG	3 in.	Round	0.276 in.	0.120 in.	Screw	4,000	39 lb.	
PS314121SCTDG	3 1/4 in.	Round	0.276 in.	0.121 in.	Screw	4,000	42 lb.	
10 Gauge								
PS314131RGTDG	3 1/4 in.	Round	0.276 in.	0.131 in.	Ring	4,000	50 lb.	
PS314131TDG	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	50 lb.	
Stainless Steel								
12 Gauge								
PS08113SSR	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	5,000	35 lb.	

Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website.

21° Plastic Strip Collated Nails
PS1067 USA-ENG/Rev. 02-25

GRABBER CONSTRUCTION PRODUCTS, INC.
5255 W 11000 N., STE 100
HIGHLAND, UT 84003

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

TECHNICAL INFORMATION: Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2025 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.
The trademarks Grabber, and Stylized G on Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

