






15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails




GRABBER®
CONSTRUCTION PRODUCTS





Wood-to-Wood Framing



Wood Siding to Wood Framing



General Wood Utility and
Pallet Construction

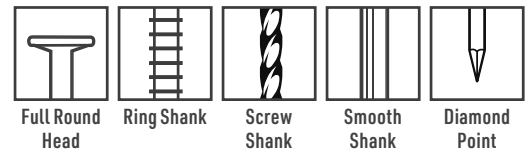

Full Round
Head

Ring Shank

Screw
Shank

Smooth
Shank

Diamond
Point

Description 15° Wire coil collated nails for framing, siding, and pallet construction.

Specifications

Size | Gauge: 0.083 in. to 0.131 in.
Length: 1 1/4 in. to 3 1/4 in.
Head Type: Full Round
Shank Type: Ring, Screw, Smooth
Finish: Bright, Electrogalvanized, Hot-Dip Galvanized, Stainless Steel, Thermal Diffusion Galvanized

Quality Assurance: Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.

LEED Reporting: The post-consumer recycled steel content is 25%.

Compliance: The fasteners comply with ASTM F1667 performance requirements.

Applications

- Wood-to-wood framing
- Wood siding to wood framing
- Pallet construction
- General wood utility construction

Installation

- Use with any 15° pneumatic coil nail gun.
- The head is fully seated when it is flush with the work surface.


15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails



Features

- Full round head nails provide a larger load-bearing surface for framing and general construction.
- Smooth shank penetrates the wood easily and smoothly.
- Ring shank nails have robust holding power. As the nail penetrates wood, fibers lock around the grooves in the shank, creating a durable bond.
- Nails with screw or spiral shanks rotate during installation, increasing pull-out resistance.
- Diamond point is designed to easily drive into wood, and it helps prevent splitting.

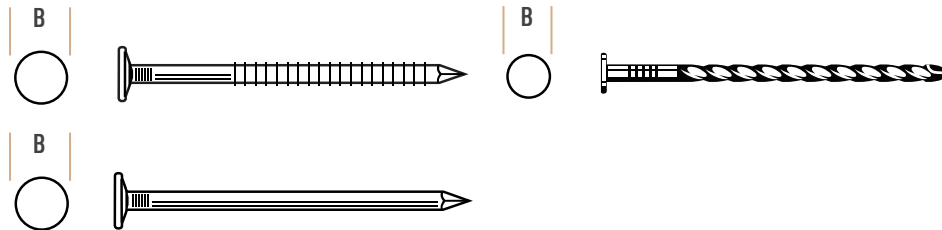

Product Dimensions

B Head Diameter	Wire Diameter	Shank Type
0.213 in.	0.083 in.	Ring
0.213 in.	0.083 in.	Screw
0.220 in.	0.084 in.	Screw
0.220 in.	0.086 in.	Screw
0.220 in.	0.090 in.	Ring
0.220 in.	0.090 in.	Ring
0.220 in.	0.090 in.	Screw
0.220 in.	0.092 in.	Ring
0.220 in.	0.092 in.	Smooth
0.220 in.	0.093 in.	Ring
0.248 in.	0.099 in.	Smooth
0.260 in.	0.099 in.	Ring
0.260 in.	0.099 in.	Screw
0.276 in.	0.113 in.	Ring
0.276 in.	0.113 in.	Screw
0.276 in.	0.113 in.	Smooth
0.276 in.	0.120 in.	Ring
0.276 in.	0.120 in.	Screw
0.276 in.	0.120 in.	Smooth
0.276 in.	0.131 in.	Ring
0.276 in.	0.131 in.	Screw
0.276 in.	0.131 in.	Smooth

15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails

GRABBER
CONSTRUCTION PRODUCTS

Ordering Information and Product Options

Item No.	Length	Head Type	Head Diameter	Wire Diameter	Shank Type	Amount	Weight	Special Features
Bright								
14 Gauge								
WC114083RGBR	1 1/4 in.	Round	0.213 in.	0.083 in.	Ring	14,000	29 lb.	Pallet/Utility Nails
WC112083RGBR	1 1/2 in.	Round	0.213 in.	0.083 in.	Ring	14,000	34 lb.	
WC112084SCBR	1 1/2 in.	Round	0.220 in.	0.084 in.	Screw	14,000	35 lb.	
WC134083SCBR	1 3/4 in.	Round	0.213 in.	0.083 in.	Screw	14,000	39 lb.	
WC134084SCBR	1 3/4 in.	Round	0.220 in.	0.084 in.	Screw	14,000	40 lb.	
WC134086SCBR	1 3/4 in.	Round	0.220 in.	0.086 in.	Screw	14,000	42 lb.	
WC200084SCBR	2 in.	Round	0.220 in.	0.084 in.	Screw	9,000	29 lb.	
12.5 Gauge								
WC112099SCBR	1 1/2 in.	Round	0.260 in.	0.099 in.	Screw	12,000	42 lb.	Pallet/Utility Nails
GAC4DS	1 1/2 in.	Round	0.248 in.	0.099 in.	Smooth	12,000	41 lb.	
WC134099SCBR	1 3/4 in.	Round	0.260 in.	0.099 in.	Screw	9,000	36 lb.	High Load, Pallet/Utility Nails
WC134099SCBRHL	1 3/4 in.	Round	0.260 in.	0.099 in.	Screw	9,000	36 lb.	
WC200099SCBR	2 in.	Round	0.260 in.	0.099 in.	Screw	9,000	41 lb.	Siding Nails
WC200099SCBRHL	2 in.	Round	0.260 in.	0.099 in.	Screw	9,000	41 lb.	High Load, Siding Nails
WC200090SCBR	2 in.	Round	0.220 in.	0.090 in.	Screw	9,000	34 lb.	Pallet/Utility Nails
WC214099SCBR	2 1/4 in.	Round	0.260 in.	0.099 in.	Screw	9,000	45 lb.	Siding Nails
WC214099RGBR	2 1/4 in.	Round	0.260 in.	0.099 in.	Ring	9,000	45 lb.	
GAC7DS	2 1/4 in.	Round	0.248 in.	0.099 in.	Smooth	9,000	46 lb.	Pallet/Utility Nails
WC212099SCBR	2 1/2 in.	Round	0.260 in.	0.099 in.	Screw	9,000	50 lb.	Siding Nails
WC212099SCBRHL	2 1/2 in.	Round	0.260 in.	0.099 in.	Screw	9,000	50 lb.	High Load, Siding Nails
12 Gauge								
WC200113RGBR	2 in.	Round	0.276 in.	0.113 in.	Ring	9,000	54 lb.	Framing Nails
WC214113SCBR	2 1/4 in.	Round	0.276 in.	0.113 in.	Screw	6,750	44 lb.	
WC238113RGBR	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	
WC238113RB45	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,500	32 lb.	
WC238113RSBR	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	
WC238113RGBRH	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	2,700	28 lb.	
WC238113BR	2 3/8 in.	Round	0.276 in.	0.113 in.	Smooth	4,000	28 lb.	Framing Nails
11 Gauge								
WC234120SCBR	2 3/4 in.	Round	0.276 in.	0.120 in.	Screw	4,000	36 lb.	Framing Nails
WC300120RGBR	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	39 lb.	
WC300120SCBR	3 in.	Round	0.276 in.	0.120 in.	Screw	4,000	39 lb.	
WC300120BR	3 in.	Round	0.276 in.	0.120 in.	Smooth	4,000	39 lb.	
WC314120SCBR	3 1/4 in.	Round	0.276 in.	0.120 in.	Screw	4,000	42 lb.	
WC314120BR	3 1/4 in.	Round	0.276 in.	0.120 in.	Smooth	4,000	42 lb.	

15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails



Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Diameter	Wire Diameter	Shank Type	Amount	Weight	Special Features
Bright (continued)								
10 Gauge								
WC212131RSBR	2 1/2 in.	Round	0.276 in.	0.131 in.	Ring	4,500	44 lb.	Framing Nails
WC212131BR	2 1/2 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	44 lb.	
WC300131SCBR	3 in.	Round	0.276 in.	0.131 in.	Screw	4,000	46 lb.	
WC300131BR	3 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	46 lb.	
WC300131BR45	3 in.	Round	0.276 in.	0.131 in.	Smooth	4,500	52 lb.	
WC300131BRH	3 in.	Round	0.276 in.	0.131 in.	Smooth	2,400	28 lb.	
WC314131SCBRH	3 1/4 in.	Round	0.276 in.	0.131 in.	Screw	2,700	50 lb.	High Load, Framing Nails
WC314131BR	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	50 lb.	Framing Nails
WC314131BR45	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,500	56 lb.	
WC312131BR	3 1/2 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	39 lb.	
Hot-Dip Galvanized								
13 Gauge								
WC112092RGHDG	1 1/2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	11 lb.	Pallet/Utility Nails
WC112093RGHDG	1 1/2 in.	Round	0.220 in.	0.093 in.	Ring	3,600	13 lb.	Siding Nails
WC134092RGHDG	1 3/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	13 lb.	
WC134092RSHDG	1 3/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	13 lb.	
WC200092RGHDG	2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	14 lb.	
WC200092RSHDG	2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	14 lb.	
WC214092RGHDG	2 1/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	16 lb.	
WC214092HDG	2 1/4 in.	Round	0.220 in.	0.092 in.	Smooth	3,600	16 lb.	
WC212092RGHDG	2 1/2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	17 lb.	
12.5 Gauge								
WC200099RGHDG	2 in.	Round	0.260 in.	0.099 in.	Ring	9,000	41 lb.	Siding Nails
WC214099RSHDG	2 1/4 in.	Round	0.260 in.	0.099 in.	Ring	9,000	45 lb.	
WC214099SCHDG	2 1/4 in.	Round	0.260 in.	0.099 in.	Screw	9,000	45 lb.	Framing Nails
WC238099SCHDG	2 3/8 in.	Round	0.260 in.	0.099 in.	Screw	4,000	21 lb.	
WC238099RGHDG	2 3/8 in.	Round	0.260 in.	0.099 in.	Ring	4,000	21 lb.	
12 Gauge								
WC200113HDG	2 in.	Round	0.276 in.	0.113 in.	Smooth	2,700	24 lb.	Siding Nails
WC238113HDGH	2 3/8 in.	Round	0.276 in.	0.113 in.	Smooth	2,700	28 lb.	
WC238113RGHDG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	Framing Nails
WC212131RGHDG	2 1/2 in.	Round	0.276 in.	0.131 in.	Ring	3,600	39 lb.	Siding Nails
11 Gauge								
WC300120RGHDG	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	39 lb.	Framing Nails
WC300120RGHDGH	3 in.	Round	0.276 in.	0.120 in.	Ring	2,400	23 lb.	High Load, Framing Nails
WC314120RGHDG	3 1/4 in.	Round	0.276 in.	0.120 in.	Ring	4,000	42 lb.	Framing Nails
WC314120SCHDG	3 1/4 in.	Round	0.276 in.	0.120 in.	Screw	4,000	42 lb.	
WC314120HDG	3 1/4 in.	Round	0.276 in.	0.120 in.	Smooth	4,000	45 lb.	
10 Gauge								
WC212131HDG	2 1/2 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	39 lb.	Framing Nails
WC300131HDG	3 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	46 lb.	
WC314131HDG	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	50 lb.	
WC314131HDG	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	50 lb.	

15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails

GRABBER
CONSTRUCTION PRODUCTS

Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Diameter	Wire Diameter	Shank Type	Amount	Weight	Special Features
Thermal Diffusion Galvanized								
13 Gauge								
WC134092RSTDG	1 3/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	13 lb.	Siding Nails
WC134092RGTDG	1 3/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	13 lb.	
WC200092RGTDG	2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	14 lb.	
WC200099RGTDG	2 in.	Round	0.220 in.	0.092 in.	Ring	9,000	41 lb.	
WC214092RGTDG	2 1/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	16 lb.	
12 Gauge								
WC238113RGTDG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	Framing Nails
11 Gauge								
WC300120RGTDG	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	39 lb.	Framing Nails
Electrogalvanized								
13 Gauge								
WC134092RGEG	1 3/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	31 lb.	Siding Nails
WC200092RGEG	2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	14 lb.	
WC200099RGEG	2 in.	Round	0.260 in.	0.099 in.	Ring	9,000	41 lb.	
WC214092RGEG	2 1/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	16 lb.	
WC214092RGEG	2 1/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	16 lb.	
WC214092EG	2 1/4 in.	Round	0.220 in.	0.092 in.	Smooth	3,600	16 lb.	
WC214092EG9M	2 1/4 in.	Round	0.220 in.	0.092 in.	Smooth	9,000	39 lb.	
12 Gauge								
WC238113RGEG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,500	31 lb.	Framing Nails
WC238113RGEG4	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	
11 Gauge								
WC300120RGEG	3 in.	Round	0.276 in.	0.120 in.	Ring	4,500	44 lb.	Framing Nails
WC300120SCEG	3 in.	Round	0.276 in.	0.120 in.	Screw	4,000	39 lb.	
10 Gauge								
WC212131RGEG	2 1/2 in.	Round	0.276 in.	0.131 in.	Ring	4,500	44 lb.	Framing Nails
WC314131EGR45	3 1/4 in.	Round	0.276 in.	0.131 in.	Ring	4,500	56 lb.	
WC314131EGR45M	3 1/4 in.	Round	0.276 in.	0.131 in.	Ring	4,500	56 lb.	

15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails



Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Diameter	Wire Diameter	Shank Type	Amount	Weight	Special Features
Stainless Steel								
13 Gauge								
WC112092RGSS	1 1/2 in.	Round	0.220 in.	0.092 in.	Ring	900	4 lb.	Siding Nails
SSWC112093RG	1 1/2 in.	Round	0.220 in.	0.093 in.	Ring	3,600	17 lb.	
WC134090RGSS	1 3/4 in.	Round	0.220 in.	0.090 in.	Ring	3,600	16 lb.	
WC175090RSSSS	1 3/4 in.	Round	0.220 in.	0.090 in.	Ring	3,600	13 lb.	Framing Nails
SSWC134090RG	1 3/4 in.	Round	0.220 in.	0.090 in.	Ring	9,000	40 lb.	
SSWC2316090RG	2 3/16 in.	Round	0.220 in.	0.090 in.	Ring	9,000	50 lb.	Framing Nails
WC214090RGSS	2 1/4 in.	Round	0.220 in.	0.090 in.	Ring	3,600	17 lb.	Siding Nails
12.5 Gauge								
WC175099RSSSS	1 3/4 in.	Round	0.260 in.	0.099 in.	Ring	3,600	15 lb.	Framing Nails
WC200099RGSS	2 in.	Round	0.260 in.	0.099 in.	Ring	3,600	16 lb.	Siding Nails
WC225099RSSSS	2 1/4 in.	Round	0.260 in.	0.099 in.	Ring	3,600	18 lb.	Framing Nails
12 Gauge								
SSWC238113RG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	1,000	7 lb.	Framing Nails
11 Gauge								
SSWC300120RG	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	40 lb.	Framing Nails
SSWC314120RG	3 1/4 in.	Round	0.276 in.	0.120 in.	Ring	4,000	42 lb.	

Note: Product availability is subject to change without prior notice, and the availability of products may differ from what is printed in literature and displayed on our website.

15° Wire Coil Collated Nails
PS1070 USA-ENG/Rev. 02-25

GRABBER CONSTRUCTION PRODUCTS, INC.
5255 W 11000 N., STE 100
HIGHLAND, UT 84003

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

TECHNICAL INFORMATION: Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2025 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.
The trademarks Grabber, and Stylized Gon Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

